


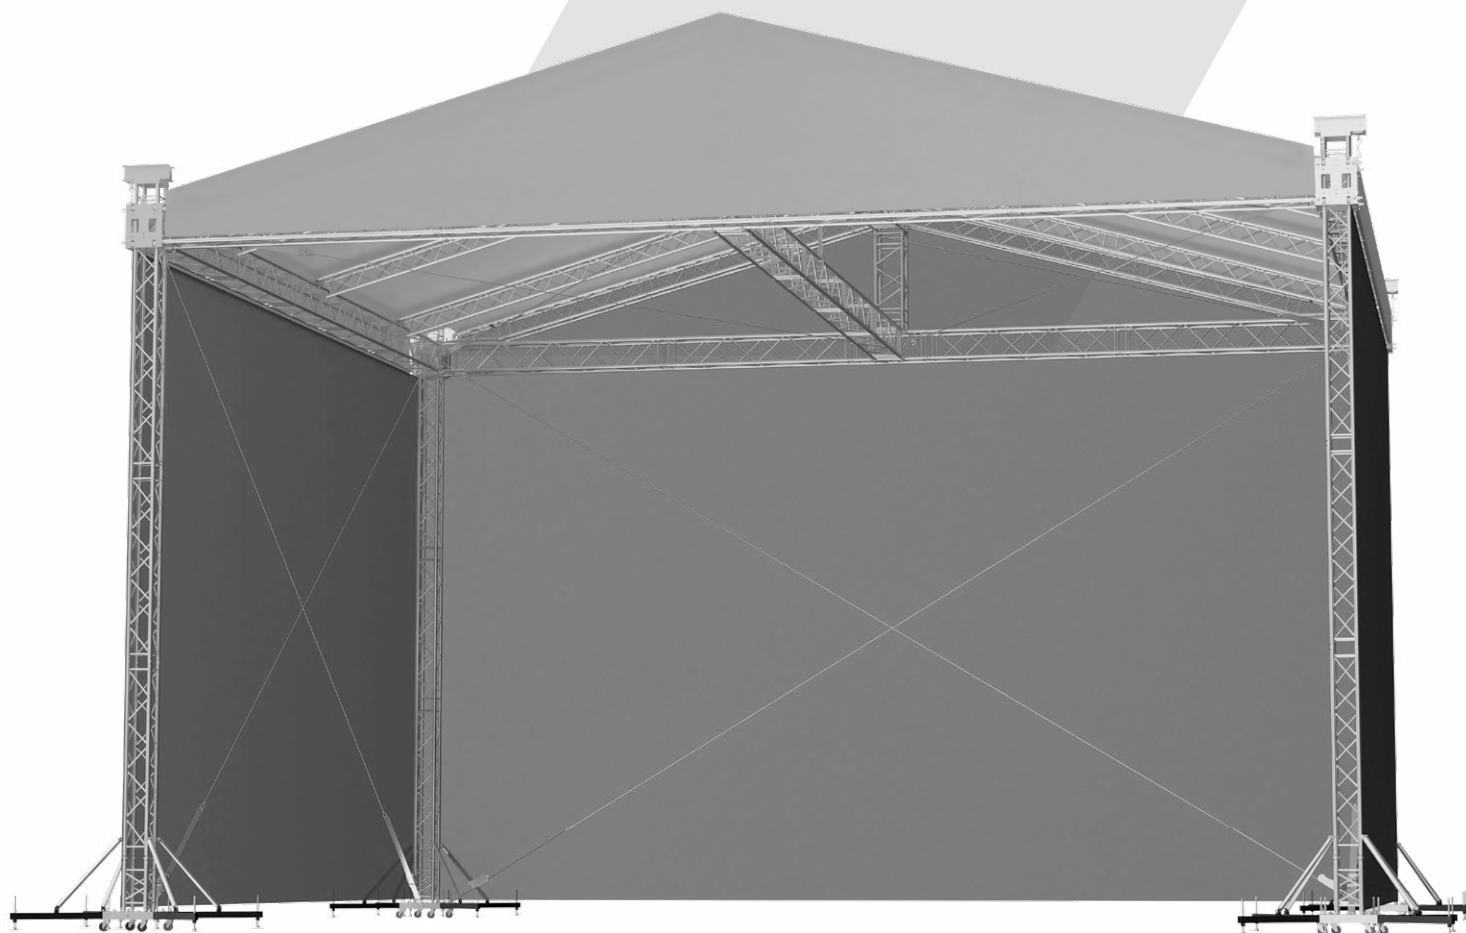


ROOF 2

Roof 2 is the best-selling roof system in our portfolio. The structure is available in three different dimensions, which cover the following stage sizes - 12 x 10 m (39 x 32.5 ft), 10 x 8 m (32.5 x 26 ft), and 8 x 6 m (26 x 19.5 ft). Its fast and easy assembly makes Roof 2 a great choice for almost any kind of event.


USED CONSTRUCTION SYSTEMS

Mast section	TT34
Support truss	FT44
Outside rafter	FT34
Inside rafter	FT33

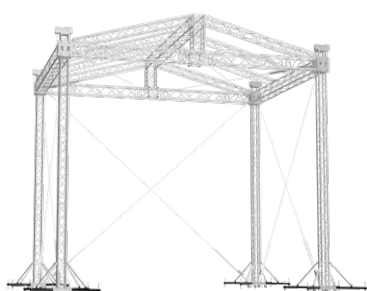


ROOF 2 8 x 6 m

Max. load bearing capacity	3500 kg (7,716 lbs)
Total weight	1630 kg (3,594 lbs)

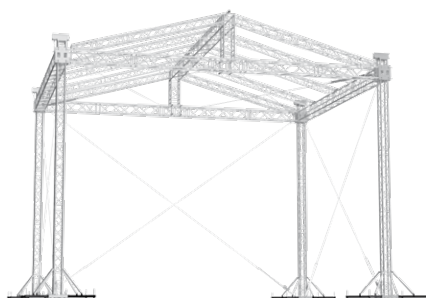


ROOF 2 10 x 8 m

Max. load bearing capacity	3500 kg (7,716 lbs)
Total weight	1915 kg (4,222 lbs)

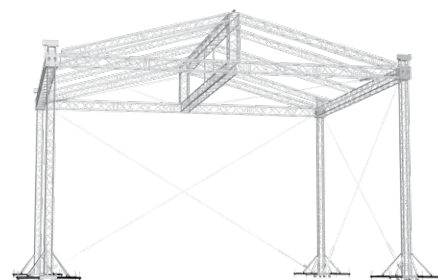

ROOF 2 12 x 10 m

Max. load bearing capacity	3500 kg (7,716 lbs)
Total weight	2040 kg (4,497 lbs)

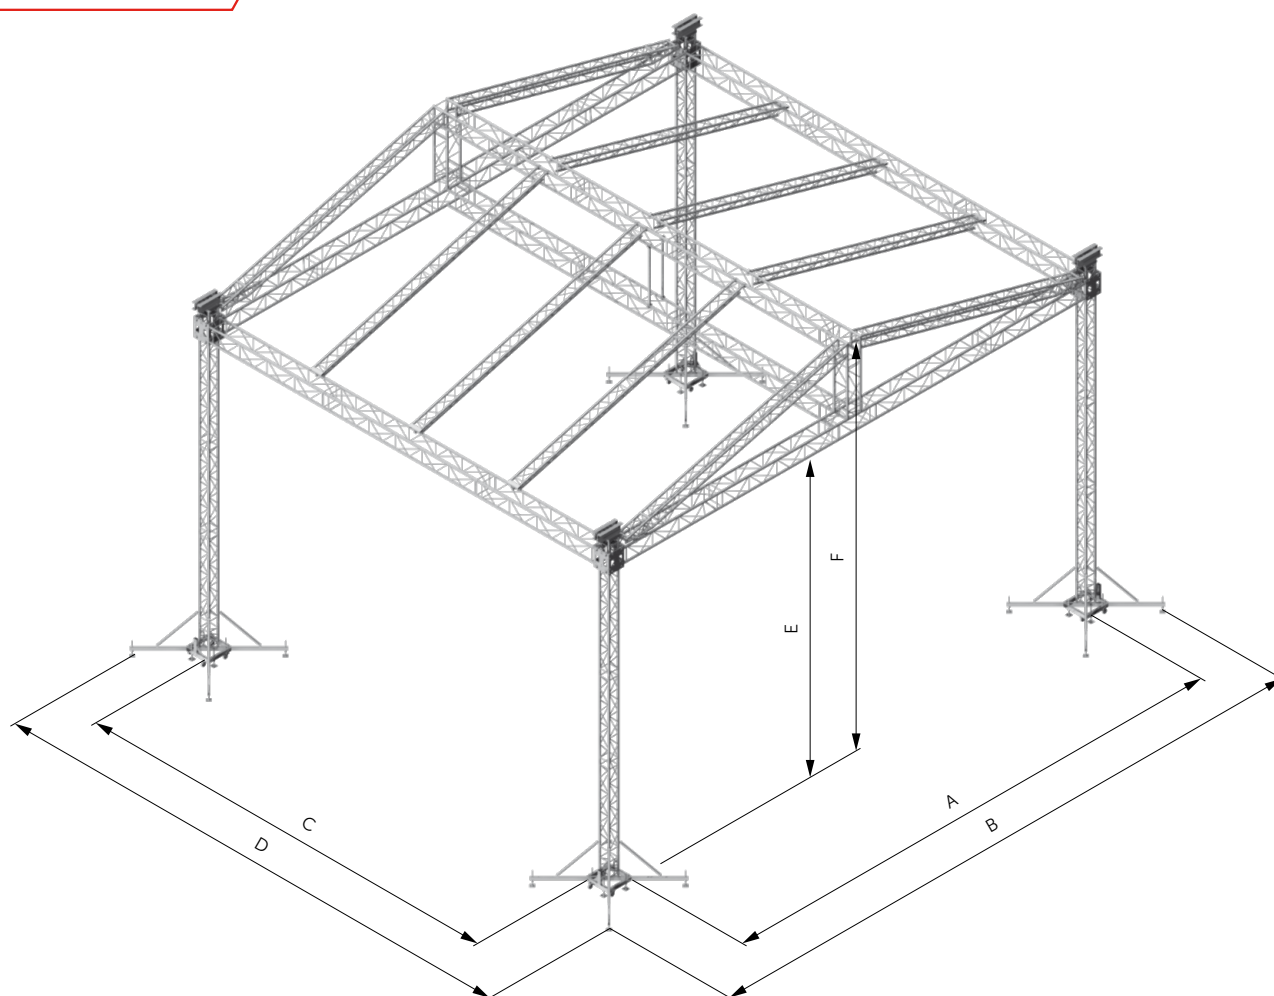

STAGE MEASUREMENTS

STAGE SIZE	Inside width	Overall width	Inside depth	Overall depth	Clearance	Height
	A	B	C	D	E	F
8 x 6 m (26.25 x 19.69 ft)	8.14 m (26.70 ft)	10.5 m (34.45 ft)	6.14 m (20.14 ft)	8.5 m (27.89 ft)	7 m (22.97 ft)	8.57 m (28.12 ft)
10 x 8 m (32.81 x 26.25 ft)	10.14 m (33.26 ft)	12.5 m (41.01 ft)	8.14 m (26.70 ft)	10.5 m (34.45 ft)	7 m (22.97 ft)	8.94 m (29.31 ft)
12 x 10 m (39.37 x 32.81 ft)	12.14 m (39.82 ft)	14.5 m (47.27 ft)	10.14 m (33.26 ft)	12.5 m (41.01 ft)	7 m (22.97 ft)	9.2 m (30.17 ft)

WIND MANAGEMENT

Wind resistance is calculated with 3 side mesh canopies applied to the structure (2 side canopies and one rear canopy). The three roof walls with canopies must be secured by guy wire cross bracing at all times as well as the top grid horizontal ceiling.

In service max. allowed windspeed - 20 m/s - 72 km/h - 45 mph

BALLAST

	8 x 6 m (26.25 x 19.69 ft)	10 x 8 m (32.81 x 26.25 ft)	12 x 10 m (39.37 x 32.81 ft)
Ballast underneath each tower base	2100 kg (4,630 lbs)	2200 kg (4,850 lbs)	2800 kg (6,173 lbs)
Total ballast	8400 kg (18,519 lbs)	8800 kg (19,401 lbs)	11 200 kg (24,692 lbs)

The ballast must be applied for secure usage of this roof system.